

UT300R2U

HIGH SPEED ADSL 2/2+ ROUTER /BRIDGE CPE WITH TR69 REMOTE MANAGEMENT
 ENABLING ROUTING AND BRIDGING FUNCTIONS VIA A SINGLE DSL CONNECTION FOR HIGH-QUALITY TRIPLE PLAY APPLICATIONS



KEY FEATURES

- Designed for enterprise, small office and residential applications
- Supports higher ADSL2/2+ speeds for Triple Play and high end video applications
 - ANSI T1.413 Issue 2
 - ITU G.992.1 (G.dmt) Annex A
 - ITU G.992.2 (G.lite) Annex A
 - ITU G.992.3 (G.dmt.bis) Annex A
 - ITU G.992.4 (G.lite.bis) Annex A
 - ITU G.992.5 Annex A
- Built-in firewall capabilities include stateful packet inspection, Denial-of-Service (DoS), firewall trigger and URL-based content filtering
- Additional security via VPN IPsec pass through, L2TP client/server and L2TP/PPTP pass through, and ID password authentication
- Supports IP Multicast, IGMP v1/v2, TFTP, DHCP, Telnet, HTTP and FTP
- Supports PPPoE (RFC 2516), PPPoA (RFC 2364), Classical IP over ATM (RFC 2225/RFC 1577), and RFC 2684 (RFC 1483) protocols
- Configuration and network management via Telnet and Web browser
- DHCP server support for LAN IP address management
- Remote management via SNMP v1, v2c and MIB II (RFC 1213)
- TR69 remote management


INTERFACES

Customer Side

- One RJ45 connector (10/100BaseT Ethernet, IEEE 802.3)
- One USB 1.1 port

Network Side

- One RJ11 connector
- Line impedance: 100 Ohms
- Connection loop: Single pair (two-wire)
- Interoperability complies with TR-48 & TR69

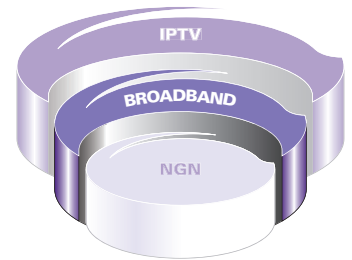

SPECIFICATIONS

Software

ATM

- ATM Cell over ADSL, AAL5
- UBR, CBR, VBR-rt and VBR-nrt
- VPI range (0-4095) and VCI range (1-65535)
- Supports up to 8 PVCs

Bridging

- Transparent bridging (IEEE 802.1D)
- RFC 2684 (RFC 1483) bridged
- Spanning Tree Protocol (IEEE 802.1D) Routing
- RIP v1/v2 and static routing
- NAT/PAT – RFC 1631 (basic firewall support)
- Supports Point-to-Point Protocol (PPP)
- PAP or CHAP for user authentication
- RFC 2684 (RFC 1483) routed
- DNS relay

Hardware

Power

- AC adapter: 9 VAC, 1000 mA (120 VAC/60 Hz or 230 VAC/50 Hz input)
- Power consumption: < 10.0 watts

Dimensions

- W x D x H: 141 x 114 x 28 mm

Environmental

- Operating: 0~45°C, 5~95% humidity
- Storage: -20~85°C, 5~95% humidity

Certifications

- Please see product website for current regional certification status

Please note the information contained herein is for informational purposes only. Technical claims listed depend on a series of technical assumptions. Your experience with these products may differ if you operate the products in an environment, which is different from the technical assumptions. UTStarcom reserves the right to modify these specifications without prior notice. UTStarcom makes no warranties, expressed or implied, on the information contained in this document.

UTStarcom, Inc. USA
 1275 Harbor Bay Parkway
 Alameda, CA 94502, USA
 Tel: 510-864-8800
 Fax: 510-864-8802

www.utstar.com

About UTStarcom, Inc.

UTStarcom is a global leader in IP-based, end-to-end networking solutions and international service and support. The company sells its broadband, wireless, and handset solutions to operators in both emerging and established telecommunications markets around the world. UTStarcom enables its customers to rapidly deploy revenue-generating access services using their existing infrastructure, while providing a migration path to cost-efficient, end-to-end IP networks. Founded in 1991 and headquartered in Alameda, California, the company has research and design operations in the United States, China, Korea and India. UTStarcom is a FORTUNE 1000 company. For more information about UTStarcom, visit the company's Web site at www.utstar.com

Copyright © 2008 UTStarcom, Inc. All Rights Reserved. UTStarcom and the UTStarcom logo are registered trademarks and A World of Better Communication is a trademark of UTStarcom, Inc. and its subsidiaries. All other trademarks are the property of their respective owners.